


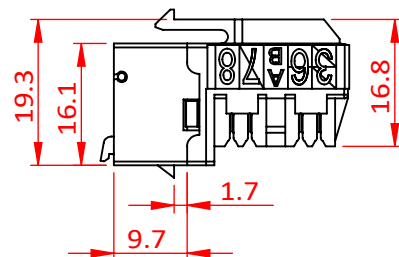




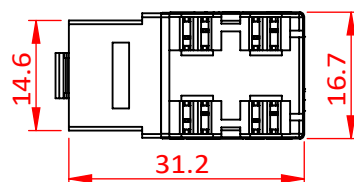




PRODUCTION



SUGGESTED MOUNTING CUTOUT



MATERIAL

KEYSTONE JACK HOUSING : ABS, UL94V-0.

SHUTTER : ABS.

JACK CONTACTS : PHOSPHOR BRONZE, 50U" GOLD PLATED.

IDC PLASTIC : PC, UL94V-0.

IDC TERMINALS : PHOSPHOR BRONZE, TIN OVER NICKEL UNDERCOAT.

IDC CAP : ABS, UL94V-0.

PHYSICAL CHARACTERISTICS

SUITABLE IMPACT TOOL : 110 STYLE PUNCH DOWN TOOL.

INSERTION LIFE : 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.

PLUG RETENTION FORCE : 11 LBF MINIMUM.

DURABILITY : 200 TERMINATION CYCLES.

CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.

OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C.

STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C.

HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

ELECTRICAL

INSULATION RESISTANCE : 500 MΩ MINIMUM.

DC CURRENT RATING : 1.5 Amps.

INPUT TO OUTPUT D.C. RESISTANCE : 200 mΩ MAXIMUM.

CONTACT RESISTANCE : 20 mΩ MAXIMUM.

VOLTAGE PROOF (CONTACT TO CONTACT) : 1000 V D.C. OR A.C. PEAK.


NOTE

* ONLY ACCEPT RJ-45 8P8C PLUG.

ENCLOSURE

IDC CAP X 1 PC

Cat 6A

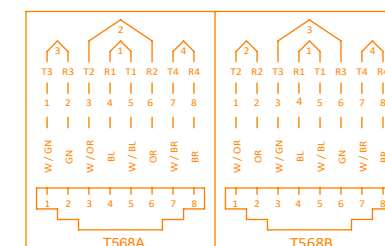

Scale	1:1	All Copy Rights Reserved	
3rd Angle Projection			
Unit	mm	Title	
Date	2022/11/16	QAD-ABL-XX	
Tolerance		Drawn by	Checked by
~20	~50	Justin	
±0.2	±0.4		
±0.5	±1.5		
ANGLE	±2°		