



PRODUCTION

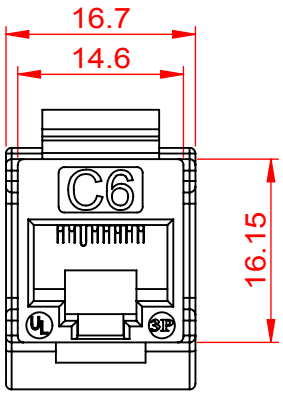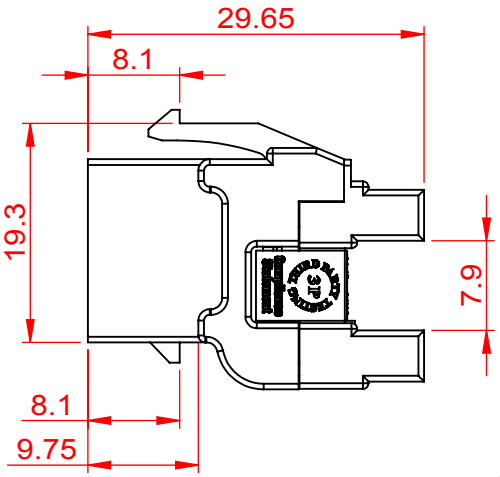


SUGGESTED MOUNTING CUTOUT

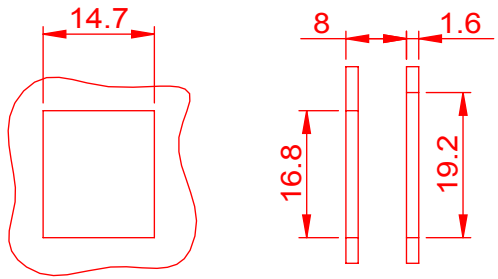


3P THIRD PARTY TESTING

COMPLIANCE STATEMENT
NO.110569A

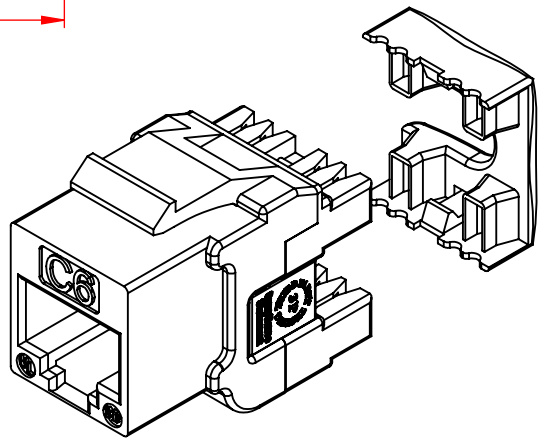
ENCLOSURE
IDC CAP X 1 PC

ACCORDING TO : ANSI/TIA-568-C.2
ISO/IEC 11801 2nd Edition
IEC 60603-7

Cat 6

56Y4
E145249

c UL us LISTED
COMMUNICATION
CIRCUIT ACCESSORIES

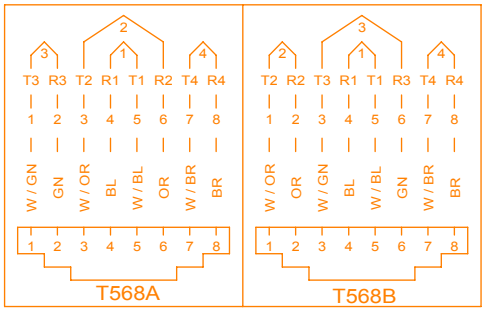


## MATERIAL

KEYSTONE JACK HOUSING : ABS,UL94V-0.
JACK CONTACTS : PHOSPHOR BRONZE,50U" GOLD PLATED.
IDC PLASTIC : PC,UL94V-0.
IDC TERMINALS : PHOSPHOR BRONZE ,TIN OVER NICKEL UNDERCOAT.

## PHYSICAL CHARACTERISTICS


SUITABLE IMPACT TOOL : 110 STYLE PUNCH DOWN TOOL.
INSERTION LIFE : 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
CONTACT FORCE : 100 GRAMS WITH FCC COMPLIANT 8P PLUG.
PLUG RETENTION FORCE : 11 LBF MIN.
DURABILITY : 200 TERMINATION CYCLES.
CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.
OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
HUMIDITY : 10%~90%RH.

## ELECTRICAL

INSULATION RESISTANCE : 500 MΩ.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC.
DC CURRENT RATING : 1.5 Amps.
DC RESISTANCE : 0.1Ω.
CONTACT RESISTANCE : 20mΩ.

## NOTE

- ONLY ACCEPT RJ-45 8P8C PLUG.




RoHS

| | | | | | | |
|---|---|---|---|---|---|---|
| Scale | 3:2 | | | | All Copy Rights Reserved | |
| 3rd Angle Projection | | | | | DCE DAN-CHIEF ENTERPRISE CO., LTD . | |
| Unit | mm | | | | Title | |
| Date | 2013/3/6 | | | | QB-ABL-XX | |
| Tolerance | | | | | | |
| ~20 | ~50 | ~150 | 150~ | ANGLE | Drawn by | Checked by |
| ±0.2 | ±0.4 | ±0.5 | ±1.5 | ±2° | Oliver | 2016.05.12 16:49:30 +08'00' |