


PRODUCTION

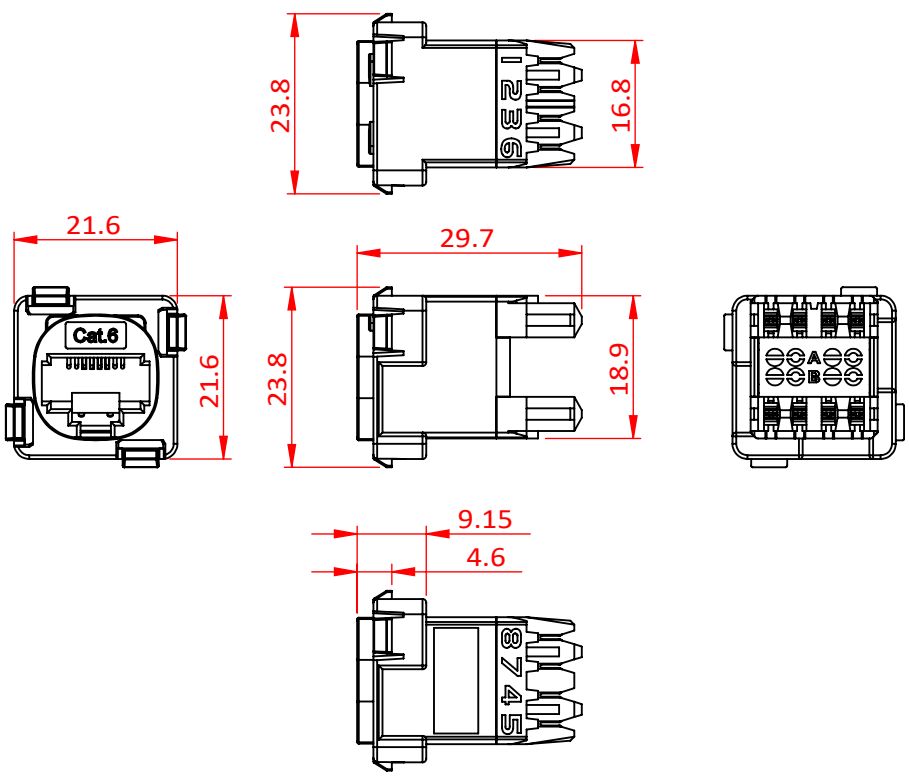

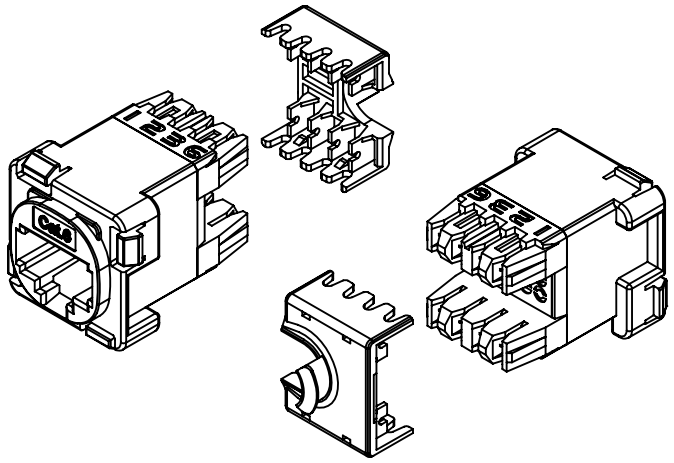

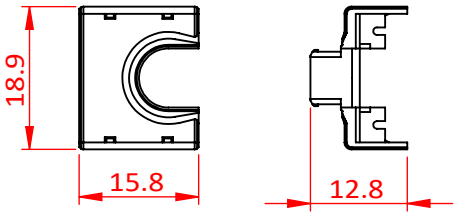

MATERIAL
KEYSTONE JACK HOUSING : PC, UL94V-0.
JACK CONTACTS : PHOSPHOR BRONZE, 50U" GOLD PAINTING.
IDC PLASTIC : PC, UL94V-0.
IDC TERMINALS : PHOSPHOR BRONZE, TIN OVER NICKEL UNDERCOAT.
IDC CAP : PC, UL94V-0.


PHYSICAL CHARACTERISTICS
SUITABLE IMPACT TOOL : 110/KRONE STYLE PUNCH DOWN TOOL.
INSERTION LIFE : 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
PLUG RETENTION FORCE : 11 LBF MINIMUM.
DURABILITY : 200 TERMINATION CYCLES.
CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.
OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C.
STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C.
HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

ELECTRICAL
INSULATION RESISTANCE : 500 MΩ MINIMUM.
DC CURRENT RATING : 1.5 Amps.
INPUT TO OUTPUT D.C. RESISTANCE : 200 mΩ MAXIMUM.
CONTACT RESISTANCE : 20 mΩ MAXIMUM.
VOLTAGE PROOF (CONTACT TO CONTACT) : 1000 V D.C. OR A.C. PEAK.

NOTE
· ONLY ACCEPT RJ-45 8P8C PLUG.

ENCLOSURE
IDC CAP X 1 PC
NYLON CABLE TIE X 1 PC
INSTRUCTION X 1 PC

Cat 6

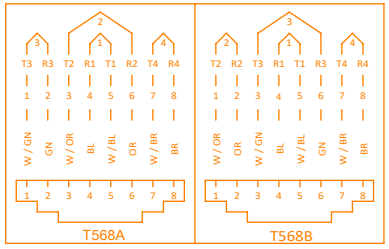

Scale	1:1					All Copy Rights Reserved
3rd Angle Projection						DAN-CHIEF TECHNOLOGY CO., LTD.
Unit	mm					Title
Date	2022/11/14					O3013AGQ8C6ABXX
Tolerance						
~20	~50	~150	150~	ANGLE	Drawn by	Checked by
±0.2	±0.4	±0.5	±1.5	±2°	Justin	2023.03.15 13:50:39 +08'00'