



PRODUCTION

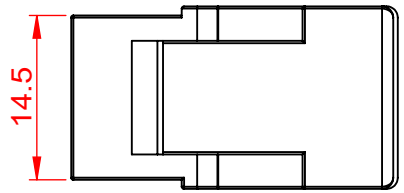


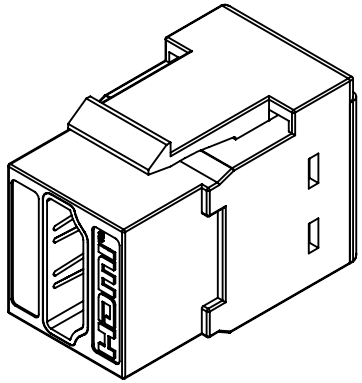



SUGGESTED MOUNTING CUTOUT








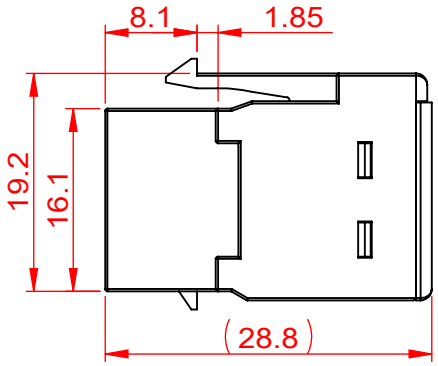





HDMI 1.4

WIRE TABLE

P1	P2	P1	P2
1	1	11	11
2	2	12	12
3	3	13	13
4	4	14	14
5	5	15	15
6	6	16	16
7	7	17	17
8	8	18	18
9	9	19	19
10	10	SHELL	SHELL

MATERIAL

HOUSING : PC, UL94V-0
CONNECTOR : HDMI 19P FEMALE, GOLD PLATED CONTACTS

PHYSICAL CHARACTERISTICS

MATING FORCE: 44.1 N MAX
UNMATING FORCE : 9.8 N MIN; 39.2 N MAX
DURABILITY : 5000 CYCLES
OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C
STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C
HUMIDITY : 10% TO 90% RH (NON-CONDENSING)

ELECTRICAL

CONTACT CURRENT RATING : 0.5 A
DIELECTRIC WITHSTANDING VOLTAGE : 300 V AC
INSULATION RESISTANCE : A.MATE 10 MΩ MIN APPLY 150 V DC
B.UNMATE 100 MΩ MIN APPLY 500 V DC
CONTACT RESISTANC : 30 mΩ MAX

Scale	3:2				All Copy Rights Reserved	
3rd Angle Projection					DAN-CHIEF TECHNOLOGY CO., LTD.	
Unit	mm				Title	
Date	2024/11/27				HD2100CXX	
Tolerance						
~20	~50	~150	150~	ANGLE	Drawn by	Checked by
±0.2	±0.4	±0.5	±1.5	±2°	Justin	2024.11.28 13:51:41 +08'00'