



PRODUCTION

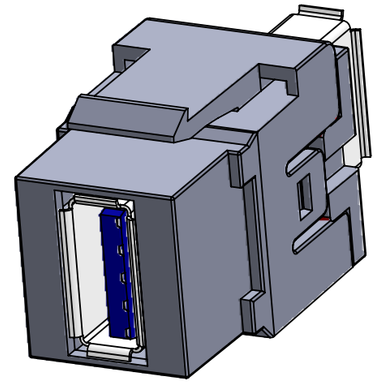

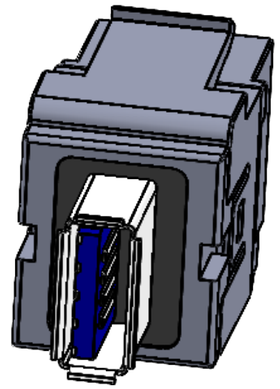


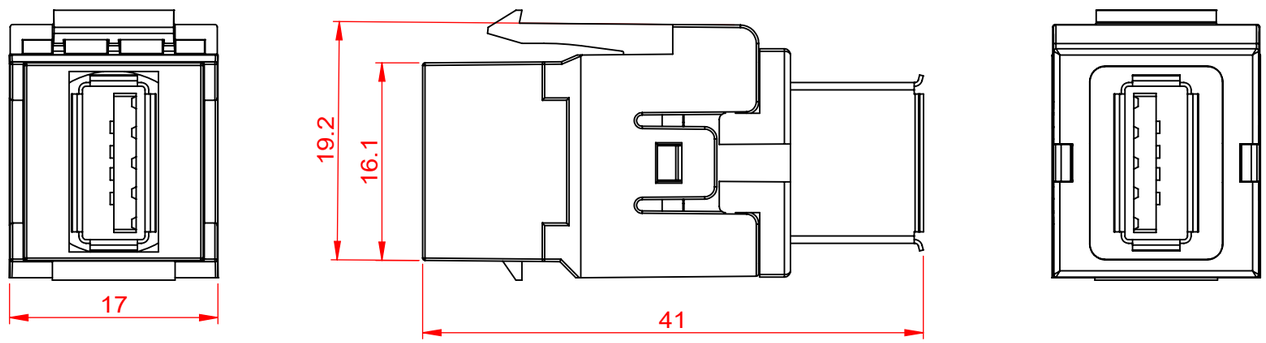

PIN ASSIGNMENT

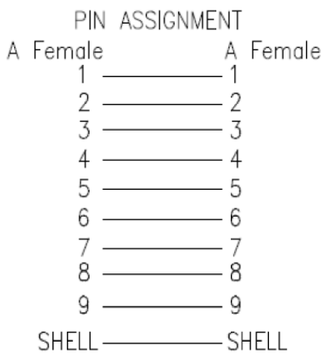

SUGGESTED MOUNTING CUTOUT

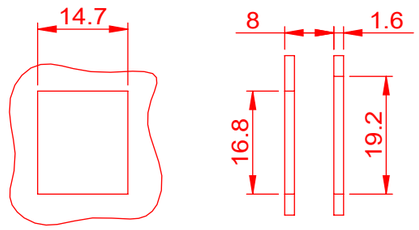

MATERIAL

HOUSING : PC, UL94V-0.
USB HOUSING : PVC.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C.
STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C.
HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

Scale	2:1					All Copy Rights Reserved	
3rd Angle Projection						DAN-CHIEF TECHNOLOGY CO., LTD.	
Unit	mm					Title	
Date	2024/4/11					2100USBIC3.0AA1A	
Tolerance							
~20	~50	~150	150~	ANGLE		Drawn by	Checked by
±0.2	±0.4	±0.5	±1.5	±2°		NICK	2024.04.11 09:26:02 +08'00'