


PRODUCTION


IP68


ACCORDING TO IEC 60529
Degrees of Protection Provided by Enclosures
6: Dust-tight
8: Protected from immersion in water for 60 minutes at a depth of 1.5 meter.

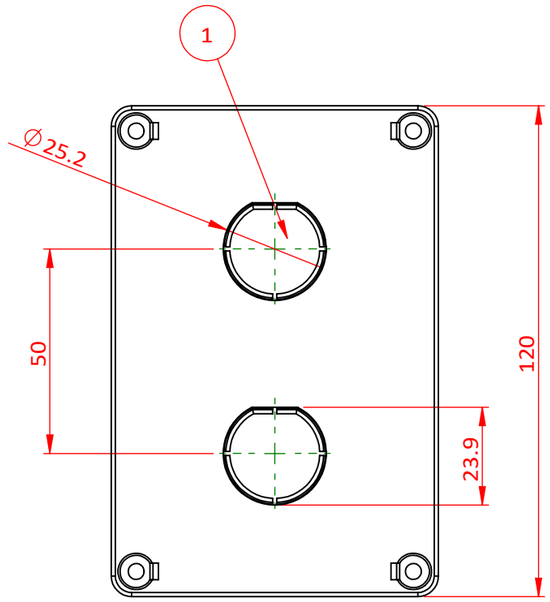

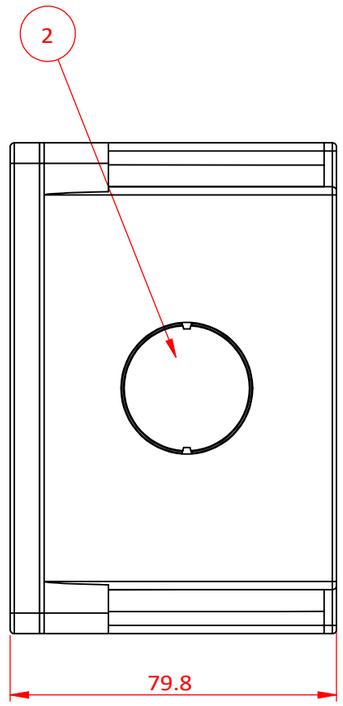

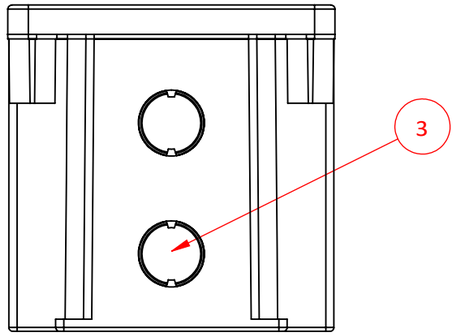

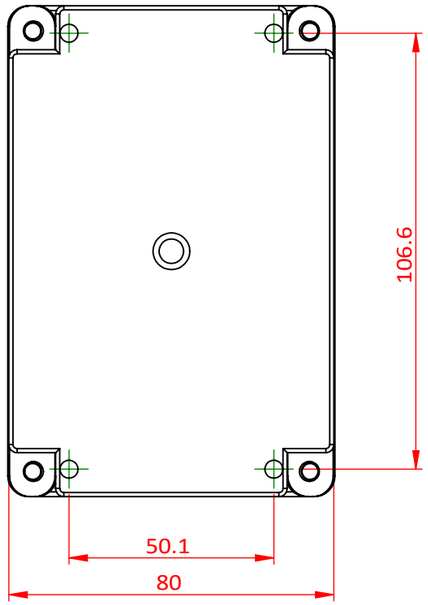

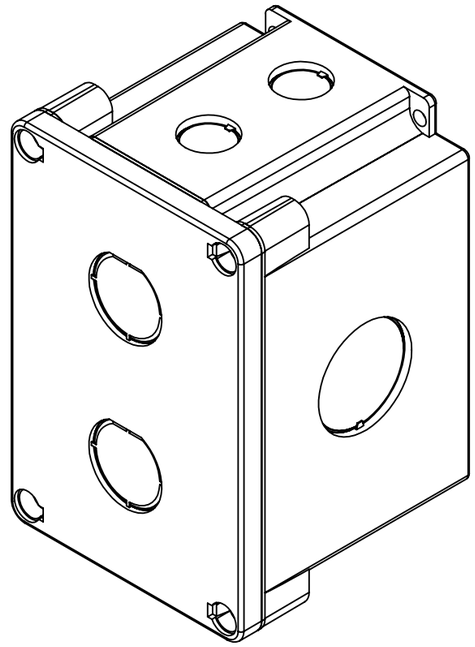

MATERIAL

HOUSING : PC, UL94V-0.
GASKET : SILICONE.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10˚C TO 60˚C.
STORAGE TEMPERATURE RANGE : -40˚C TO 68˚C.
HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

NOTE

1. Knockout Holes x 2
2. Suitable for standard M32 Conduit Gland
3. Suitable for standard M16 Cable Gland x 2

ENCLOSURE

SCREW X 8 PCS
SCREW CAP X 4 PCS

Scale	2:3					All Copy Rights Reserved	
3rd Angle Projection						DAN-CHIEF TECHNOLOGY CO., LTD.	
Unit	mm					Title	
Date	2023/6/2					WP-MBN-X00XX	
Tolerance							
~20	~50	~150	150~	ANGLE		Drawn by	Checked by
±0.2	±0.4	±0.5	±1.5	±2˚		Justin	2023.06.02 13:21:52 +08'00'