



PRODUCTION

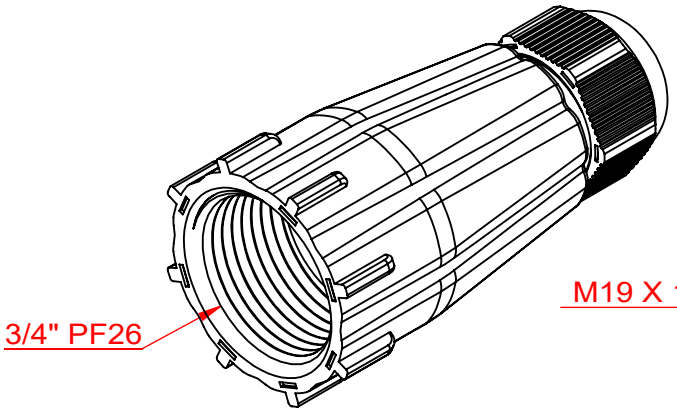


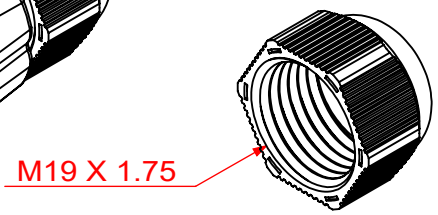


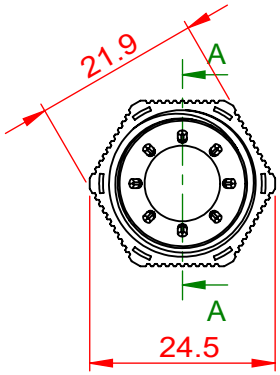


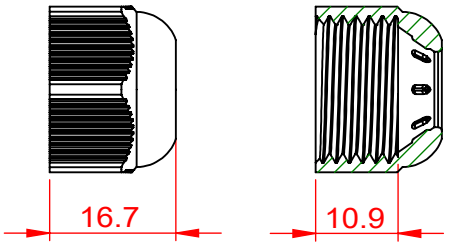

SECTION A-A

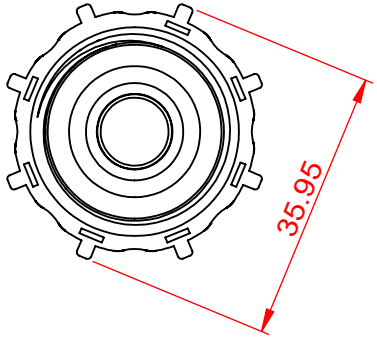

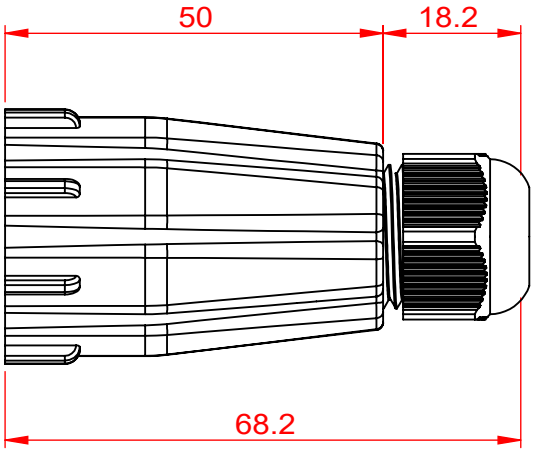



IP68

ACCORDING TO IEC 60529
Degrees of Protection Provided by Enclosures
6: Dust-tight
8: Protected from immersion in water for 60 minutes at a depth of 1.5 meter.

MATERIAL

MAIN BODY : PC,UL94V-0.
SEALIN NUT : PC,UL94V-0.
BACK GASKET : RUBBER.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C.
STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C.
HUMIDITY : 10%~90%RH (NON-CONDENSING).
CABLE JACKET DIAMETER : 5 mm TO 8.5 mm

Scale	1:1				All Copy Rights Reserved	
3rd Angle Projection					DAN-CHIEF TECHNOLOGY CO., LTD.	
Unit	mm				Title	
Date	2024/5/22				WP-AD-XX	
Tolerance						
~20	~50	~150	150~	ANGLE	Drawn by	Checked by
±0.2	±0.4	±0.5	±1.5	±2°	Justin	2024.05.23 09:53:39 +08'00'